



# DATA SHEET

## Hall Effect Current Sensor

PN: CHB\_LFT15D100S


I<sub>PN</sub>=200~500A

### Feature

- Closed- loop (compensated) current transducer
- Capable measurement of currents: DC, AC,pulse with galvanic isolation between primary circuit and secondary circuit.
- Supply voltage: DC ±15~24V

### Advantages

- High accuracy
- Easy installation
- Low temperature drift
- Optimized response time
- High immunity to external interference



- Very good linearity
- Can be customized



### Applications

- The application of variable frequency electrical appliances
- AC/DC variable-speed drive
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Inverter applications



RoHS



### Electrical data: (T<sub>a</sub>=25°C, V<sub>c</sub>= ±15VDC)

Parameter	Ref	CHB200LFT15 D100S	CHB300LFT15 D100S	CHB500LFT15 D100S
Rated input I <sub>pn</sub> (A)		200	300	500
Measuring range I <sub>p</sub> (A)		0 ~ ±628	0 ~ ±940	0 ~ ±1570
Turns ratio N <sub>p</sub> /N <sub>s</sub> (T)		1:2000	1:3000	1:5000
Output current rms I <sub>S</sub> (mA)		I <sub>p</sub> /N <sub>s</sub> (±100)	I <sub>p</sub> /N <sub>s</sub> (±100)	I <sub>p</sub> /N <sub>s</sub> (±100)
Secondary coil resistance R <sub>S</sub> (Ω)		21	31	52
Inside resistance R <sub>M</sub> (Ω)		$R_{M \max} = N_s \frac{V_{c \min} - 0.5V}{I_p} - R_{S \max} - 1.1 \Omega$		
Supply voltage V <sub>C</sub> (V)		(±15 ~ ±24) ±5%		
Accuracy X <sub>G</sub> (%)		@I <sub>PN</sub> ,T=25°C	< ±0.2	
Offset current I <sub>OE</sub> (mA)		@I <sub>p</sub> =0,T=25°C	< ±0.2	
Temperature variation of I <sub>OE</sub> I <sub>OT</sub> (mA/°C)		@I <sub>p</sub> =0,-40 ~ +85°C	< ±0.5	
Linearity error ε <sub>r</sub> (%FS)		< 0.1		



Cheemi Technology Co., Ltd

Tel: 025-85996365 E-mail: info@cheemi-tech.com www.cheemi-tech.com  
Add:N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.

# Cheemi Technology Co., Ltd

Di/dt (A/μs)		> 100
Response time $t_{ra}$ (μs)	@90% of $I_{PN}$	< 1.0
Power consumption $I_C$ (mA)		20+Is
Bandwidth BW(KHZ)	@-3dB, $I_{PN}$	DC-150
Insulation voltage $V_d$ (KV)	@50/60Hz, 1min, AC	6.0

## General data:

Parameter	Value
Operating temperature $T_A$ (°C)	-50~ +85
Storage temperature $T_S$ (°C)	-55~ +125
Mass $M$ (g)	300
Plastic material	PBT G30/G15, UL94- V0;
Standards	IEC60950-1:2001
	EN50178:1998
	SJ20790-2000


## Dimensions(mm):

	<p style="text-align: center;"><b>Connection</b></p>
	<p style="text-align: center;"><b>General tolerance</b></p> <p>General tolerance: &lt;math&gt;\pm 0.5\text{mm}&lt;/math&gt;          Primary through-hole: <math>D\ 28\pm 0.2</math>          Connection of Secondary :          2510-3</p>



**Characteristics chart:**

Temperature drift @ $I_P=0$ ,  $-60^{\circ}\text{C} \sim +105^{\circ}\text{C}$  (mA/ $^{\circ}\text{C}$ )

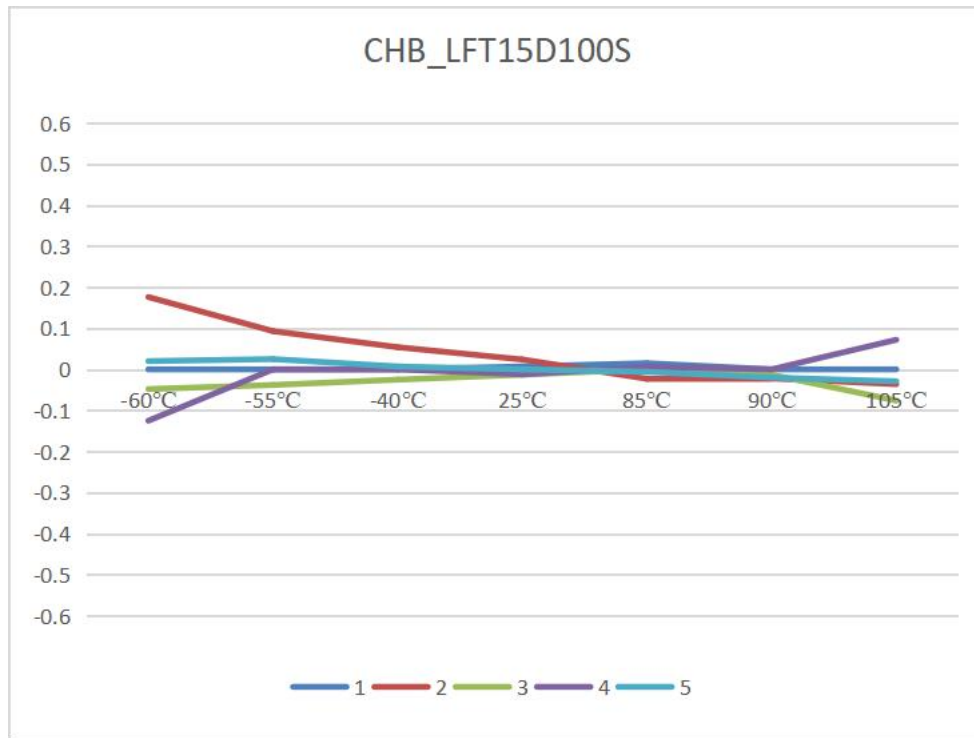

**Remarks:**

- When the current goes through the primary pin of a sensor, the voltage will be measured at the output end.
- Custom design is available for the different rated input current and the output voltage.
- The dynamic performance is the best when the primary hole is fully filled with.
- The primary conductor should be  $<100^{\circ}\text{C}$ .

**WARNING : Incorrect wiring may cause damage to the sensor.**

