

Inductive Proximity Sensor/Switch Datasheet

CAM30-18GM Series Cylindrical Type Photoelectric Sensor


Introduction

- Photoelectric sensor is a piece of equipment used to discover the distance, absence, or presence of an object by using a light transmitter, often infrared, and a photoelectric receiver. There are three different useful types: through beam, diffused and retro-reflective.
- Through-beam type photoelectric switch is designed that via the light beam between opposite-mounted transmitter and receiver, the object passing through these two devices will interrupt the light beam and start the receiver. The detection range of this type is up to 50M from 5M.
- Diffuse reflection type photoelectric switch integrates the transmitter and the receiver. Light reflected by the photoelectric switch is reflected back to the receiver by the detected object. Normally the detection range of this type is from 10cm to 1M
- Retro-reflective type photoelectric switch also integrates the transmitter and the receiver. Its difference from other models is that reflector is used to reflect light to the photoelectric switch. The detection range of this type is up to 2M.

Features:

- ◆ All-purpose type ,which can directly substitute the same type of P+F and OMRON
- ◆ Power supply reversal connection protection ;short-circuit protection ,can directly connect with PLC
- ◆ Newly added current over-load protection
- ◆ Long service life ,high reliability and strong resistance property to environment
- ◆ Red LED indicates that it's available to detect the sensor operating state
- ◆ Newly added metal housing to improve the installation intensity
- ◆ Countermeasure to improve the housing intensity and to solve disconnection
- ◆ M8 correlation has been trial-produced and promoted
- ◆ IP67 protection structure (IEC specification)

Structure Parameter:

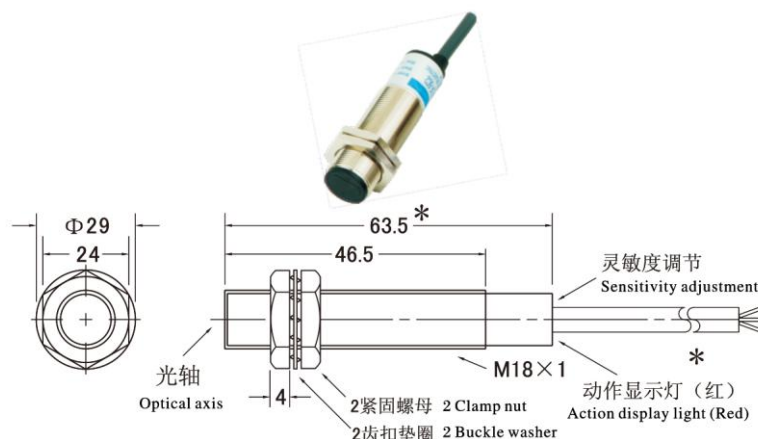



Inductive Proximity Sensor/Switch Datasheet

Ordering Part Number:

Model	Detection distance	Switch point function	Working voltage	Connection form
CAM30-18GM-N1	30cm±10%	NPN NO	DC6-36V	NPN NO
CAM30-18GM-N2	30cm±10%	NPN NC	DC6-36V	NPN NC
CAM30-18GM-N4	30cm±10%	NPN NO+NC	DC6-36V	NPN NO+NC
CAM30-18GM-P1	30cm±10%	PNP NO	DC6-36V	PNP NO
CAM30-18GM-P2	30cm±10%	PNP NC	DC6-36V	PNP NC
CAM30-18GM-P4	30cm±10%	PNP NO+NC	DC6-36V	PNP NO+NC
CAM30-18GM-X	30cm±10%	NPN/PNP/NO/NC	DC10-30V	
CAM30-18GM-A1	30cm±10%	AC NO	AC90-250V	AC NO
CAM30-18GM-A2	30cm±10%	AC NC	AC90-250V	AC NC
CAM30-18GM-W	30cm±10%	AC NO+NC	AC90-250V	AC NO+NC

Technical Parameter:

Rated action distance (Sn)	30cm
Detection method	Diffuse reflection type
Detection target	Transparent /Opaque object
Detection range regulation	Sensitivity adjuster
Switching frequency (f)	300 HZ
Hysteresis (H)	Typical values%
Reverse polarity protection	Yes
Short circuit protection	Pulse
Voltage drop (Ud)	DC≤1 V
Voltage drop (Ud)	AC≤7 V
Working current (I _L)	0~300 mA





Inductive Proximity Sensor/Switch Datasheet

Leakage current (Ir)	0~0.5mA typical values 0.1uA, 25°C
No-load current (I _D)	≤15mA
Indicator light	Red LED
environment temperature	-20°C~70°C(248-343K)
Connection form	2m, PVC
Conductor cross-sectional area	0.15mm ²
Shell material	Brass, Nickel plating
Induction surface	PMMA
Protection grade	IP65
Standard	EN 60947-1:2004

