

# Inductive Proximity Sensor/Switch Datasheet

## CF-HJ03 Slot Type Color Identity Photoelectric Switch Sensor

### Introduction


- Photoelectric sensor is a piece of equipment used to discover the distance, absence, or presence of an object by using a light transmitter, often infrared, and a photoelectric receiver. There are three different useful types: through beam, diffused and retro-reflective.
- Through-beam type photoelectric switch is designed that via the light beam between opposite-mounted transmitter and receiver, the object passing through these two devices will interrupt the light beam and start the receiver. The detection range of this type is up to 50M from 5M.
- Diffuse reflection type photoelectric switch integrates the transmitter and the receiver. Light reflected by the photoelectric switch is reflected back to the receiver by the detected object. Normally the detection range of this type is from 10cm to 1M.
- Retro-reflective type photoelectric switch also integrates the transmitter and the receiver. Its difference from other models is that reflector is used to reflect light to the photoelectric switch. The detection range of this type is up to 2M.

### Features:

- ◆ All-purpose type ,which can directly substitute the same type of P+F and OMRON
- ◆ Power supply reversal connection protection ;can directly connect with PLC
- ◆ For slot type ,there is no need to adjust the optical axis
- ◆ Long service life ,high reliability and strong resistance property to environment
- ◆ Red LED indicates that it's available to detect the sensor operating state
- ◆ Newly added metal housing to improve the installation intensity
- ◆ Countermeasure to improve the housing intensity and to solve disconnection
- ◆ IP67 protection structure (IEC specification)

# Inductive Proximity Sensor/Switch Datasheet

## Structure Parameter:

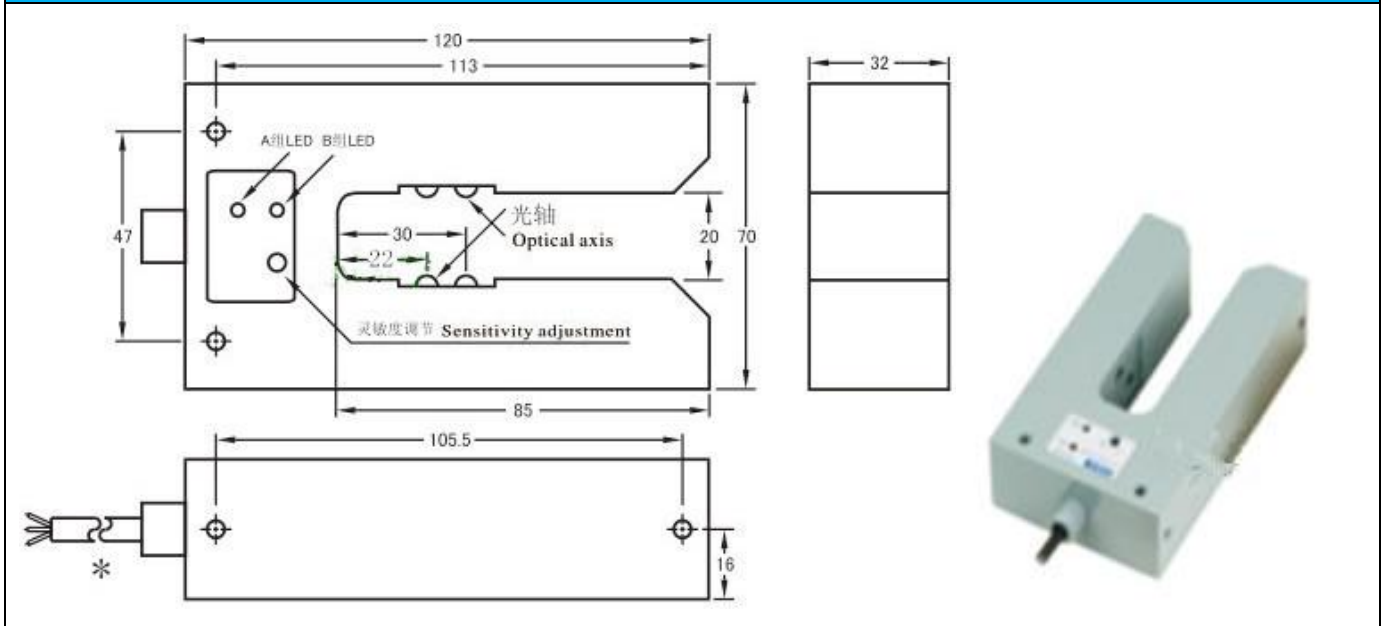

## Technical Parameter:

Dimension			32×70×120
Type	AC type	NO+NC	CF-HJ03
Light chromatography			Red, green, blue, white
Light spot (color)			Dot (green)
Supply voltage			AC12-24V±10%
Detection method			Slot type
Detection range			20mm
Edge detection control precision			<8mm
Photoelectric detection group number			2 groups
Output signal			2 groups independent contactless output AC12-24V
Detection target			Opaque object
Detection range regulation			Sensitivity adjuster
Response frequency			25 Hz
Working current			300mA below
Insulation impedance			50 MΩ
environment temperature			-20℃~70℃(248-343K)
Connection form			2m, PVC
Protection grade			IP65