



# DATA SHEET

## Hall Effect Current Sensor

**PN: CHB\_AP18S1R**

**IPN=50~200A**

### Feature


- Closed- loop (compensated) current transducer
- Capable measurement of currents: DC, AC, pulse with galvanic isolation between primary circuit and secondary circuit.
- Supply voltage: DC +15~18 V

### Advantages

- High accuracy
- Easy installation
- Low temperature drift
- Optimized response time, no insertion losses
- Low power consumption
- High immunity to external interference
- Very good linearity
- Can be customized

### Applications

- The application of induction cooker
- AC/DC variable-speed drive
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Inverter applications

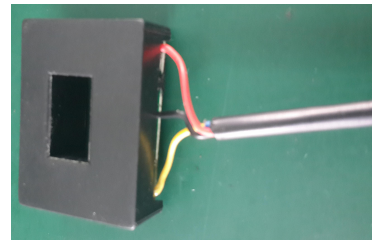

RoHS



### Electrical data: (Ta=25°C, Vc=+18.0VDC)

Parmeter \ Ref	CHB50 AP18S1R	CHB100 AP18S1R	CHB125 AP18S1R	CHB200 AP18S1R
Rated input Ipn(A)	50	100	125	200
Measuring range Ip(A)	0~+150	0~+300	0~+375	0~+600
Turns ratio Np/NS (T)	1:1000	1:2000	1:1000	1:2000
Secondary coil resistance RS (Ω)	30	50	30	50
Output voltage Vo(v)	+1.0*IP/IPN			
Load resistance KL(KΩ)	>10			
Supply voltage VC(V)	(+15 ~ +18) ±5%			
Accuracy XG(%)	@IPN, T=25°C		< ±0.5	
Offset voltage VOE(mV)	@IP=0, T=25°C		< +40	
Temperature variation of VOE VOT(mA/°C)	@IP=0, -40 ~ +85°C		< ±0.5	
Linearity error er(%FS)	< 0.1			
Di/dt accurately followed (A/μs)	> 100			
Response time tra(μs)	@90% of IPN		< 1.0	
Power consumption IC(mA)	15+Is			
Bandwidth BW(KHZ)	@IPN		DC-DC	



Insulation voltage Vd(KV)	@50/60Hz, 1min,AC	3.0
---------------------------	-------------------	-----

## General data:

Parameter	Value
Operating temperature TA(°C)	-40 ~ +85
Storage temperature TS(°C)	-55~ +125
Mass M(g)	25
Plastic material	PBT G30/G15, UL94- V0;
Standards	IEC60950-1:2001
	EN50178:1998
	SJ20790-2000

## Dimensions(mm):

	<p>Connection</p>
	<p>General tolerance</p> <p>General tolerance: &lt;math&gt;\pm 0.5\text{mm}&lt;/math&gt;            Primary through-hole : <math>10.5 \times 16.2 \pm 0.15\text{mm}</math>            Secondary pin:            3 core cable L=650mm</p>

## Remarks:

- When the current goes through the primary pin of a sensor, the voltage will be measured at the output end.
- Custom design is available for the different rated input current and the output voltage.
- The dynamic performance is the best when the primary hole is fully filled with.
- The primary conductor should be  $<100^\circ\text{C}</math>.$

**WARNING : Incorrect wiring may cause damage to the sensor.**

