



DATA SHEET

Hall Effect Current Sensor

PN: CHK_DHAB5S2L

IPN=30/300A

Feature

- Open-loop
- Capable measurement of currents: DC, AC, pulse with galvanic isolation between primary circuit and secondary circuit.
- Having different current measuring range in the same housing :from ±20A to ±600A;
- Internal circuit adopts ASIC packaging technology

Advantages

- Good accuracy for high and low current range ;
- Easy installation
- Low thermal offset drift
- Low thermal sensitivity drift

Applications

- EV and utility vehicle
- Battery pack monitoring
- Hybrid Vehicles
- Uninterruptible Power Supplies (UPS)
- Inverter applications



Electrical data: (Ta=25°C, Vc=+5.0VDC, RL=10KΩ)

Parameter	Ref	CHK30DHAB5S2L Channel 1	CHK300DHAB5S2L Channel 2	Conditions
Rated input Ipn(A)		±30	±300	@T=25°C
Measuring range Ip(A)		±30	±300	@T=25°C
Sensitivity S (mV/A)		66.7	6.67	@T=25°C
Output voltage Vo(V)		2.500±2.0*(IP/IPN)	2.500±2.0*(IP/IPN)	@T=25°C
Output voltage Vo(V)		2.500(VC/2)	2.500(VC/2)	@IP=0, T=25°C, +5V
Offset current IOE(mA)		±50	±700	@T=25°C
Magnetic offset current IOM(mA)		±50	±2300	@T=25°C
General offset current IO(A)		±0.1	±3.0	@T=25°C
		-0.3~+0.3	-4~+4	@-10°C<T<65°C
		-0.5~+0.5	-4.5~+4.5	@-40°C<T<125°C
Sensitive error XG(%)		±0.5		@T=25°C
		-2.5~+2.5		@-10°C<T<65°C
		-4~+4		@-40°C<T<125°C



Tel: 025-85996365 E-mail: info@cheemi-tech.com www.cheemi-tech.com

Add:N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.

Cheemi Technology Co., Ltd

Linearity error $\epsilon r(\%FS)$	-1~+1	
Supply voltage V(VC)	+5.0 ±5%	
Current consumption IC(mA)	<20	
Load resistance RL(KΩ)	>10	
Capacitive loading CL(nF)	1~100	
Resolution (mV)	2.5	@VC=5.0V
Output clamping voltage min VSZ(V)	0.24~0.26	@VC=5.0V
Output clamping voltage max VSZ(V)	4.74~4.76	@VC=5.0V
Output internal resistance Rout(Ω)	1~10	
Bandwidth Bw(KHZ)	1.0	@-3DB
Power up time (ms)	110	
Setting time after over load (ms)	25	

Absolute maximum ratings:

Parameter	Value	Conditions
Supply voltage VC(V)	<8.5	
	14	@1min , T=25°C
	-14	@1min , T=25°C
Output voltage (analog) Vout (V)	8.5	
Output over voltage (analog) Vout (V)	14	@1min , T=25°C

General data:

Parameter	Value
Operating temperature TA(°C)	-40 ~ +85
Storage temperature TS(°C)	-55~ +125
Mass M(g)	70
Plastic material	PBT G30/G15, UL94- V0;
Standards	IEC60950-1:2001
	EN50178:1998
	SJ20790-2000





Cheemi Technology Co., Ltd

Tel: 025-85996365 E-mail: info@cheemi-tech.com www.cheemi-tech.com
Add:N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.

Cheemi Technology Co., Ltd

Dimensions(mm):

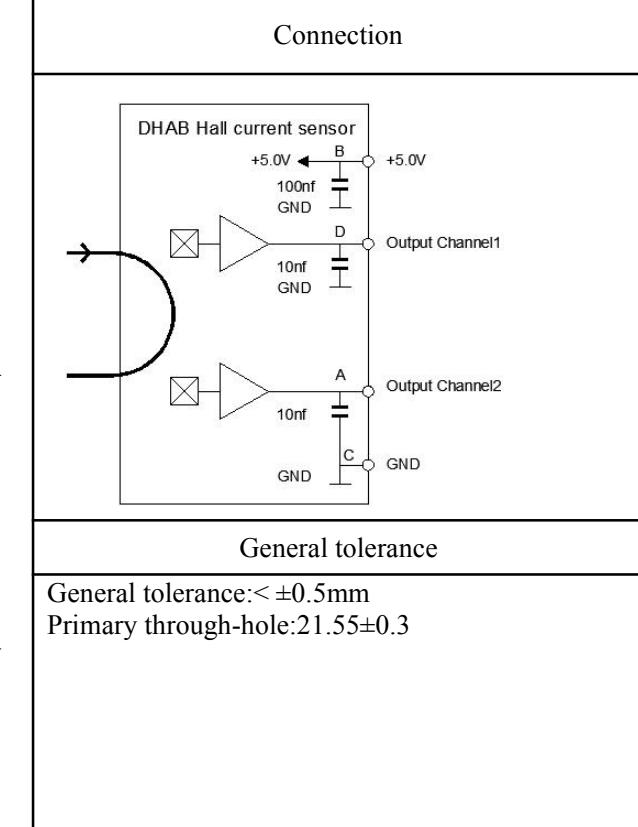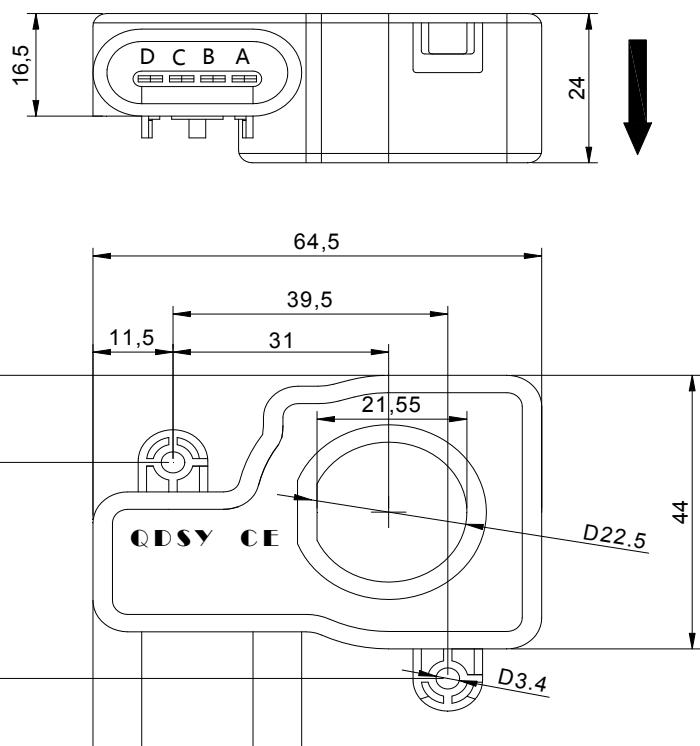

Remarks:

- When the current goes through the primary pin of a sensor, the voltage will be measured at the output end.
- Custom design is available for the different rated input current and the output voltage.
- The dynamic performance is the best when the primary hole if fully filled with.
- The primary conductor should be $<100^\circ\text{C}$.

WARNING : Incorrect wiring may cause damage to the sensor.



Cheemi Technology Co., Ltd

Tel: 025-85996365 E-mail: info@cheemi-tech.com www.cheemi-tech.com
Add:N22, Xianlongwan, Xianyin South Road, Qixia District, Nanjing - China.