



# DATA SHEET

## Hall Effect Current Sensor

PN: CHK\_BS15D4

IPN=50-600A

### Feature

- Open- loop
- Capable measurement of currents: DC, AC, pulse with galvanic isolation between primary circuit and secondary circuit.
- Supply voltage: DC  $\pm 12 \sim 15V$

### Advantages

- Excellent accuracy
- Easy installation
- No insertion losses
- Low power consumption
- Wide current measuring range
- High immunity to external interference
- Very good linearity
- Can be customized

### Applications

- Inverter applications
- AC/DC variable-speed drive
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Frequency drive control home appliances



RoHS



Electrical data: ( $T_a=25^\circ C$ ,  $V_c=\pm 15.0VDC$ ,  $R_L=1.0K\Omega$ )

Parameter	Ref	CHK50 BS15D4	CHK100 BS15D4	CHK200 BS15D4	CHK300 BS15D4	CHK400 BS15D4	CHK600 BS15D4
Rated input $I_{pn}(A)$		50	100	200	300	400	600
Measuring range $I_p(A)$		0 $\sim$ $\pm 150$	0 $\sim$ $\pm 300$	0 $\sim$ $\pm 600$	0 $\sim$ $\pm 900$	0 $\sim$ $\pm 900$	0 $\sim$ $\pm 900$
Output voltage $V_o(V)$		$\pm 4.0 * (I_p / I_{PN})$					
Load resistance $R_L(K\Omega)$		$> 1.0$					
Supply voltage $V_C(V)$		$(\pm 12 \sim \pm 15) \pm 5\%$					
Accuracy $X_G(\%)$		@IPN, $T=25^\circ C$		$< \pm 1.0$			
Offset voltage $V_{OE}(mV)$		@IP=0, $T=25^\circ C$		$< \pm 25$			
Temperature variation of VOE $V_{OT}(mV/^\circ C)$		@IP=0, $-40 \sim +85^\circ C$		$< \pm 1.0$			
Hysteresis offset voltage $V_{OH}(mV)$		@IP=0, after 1*IPN		$< \pm 25$			
Linearity error $\epsilon_r(\%FS)$		$< 1.0$					
Di/dt accurately followed ( $A/\mu s$ )		$> 100$					
Response time $t_{ra}(\mu s)$		@90% of IPN		$< 3.0$			
Power consumption $I_C(mA)$		15					



# Cheemi Technology Co., Ltd

Bandwidth Bw(KHZ)	@-3dB, IPN	DC-20
Insulation voltage Vd(KV)	@50/60Hz, 1min,AC	2.5


## General data:

Parameter	Value
Operating temperature TA(°C)	-40 ~ +85
Storage temperature TS(°C)	-55~ +125
Mass M(g)	65
Plastic material	PBT G30/G15, UL94- V0;
Standards	IEC60950-1:2001
	EN50178:1998
	SJ20790-2000

## Dimensions(mm):

CHK_BS15D4A	CHK_BS15D4B	Connection
		<p>General tolerance</p> <p>General tolerance: &lt;math&gt;\pm 0.5\text{mm}&lt;/math&gt;            Primary through-hole : <math>10.5*20.5\pm 0.3</math>            Connection of Secondary :            CHK_BS15D4A/B: 2510-04A (Instead of Molex 5045-04A)            CHK_BS15D4C: 15EDGK3.81-04P            CHK_BS15D4D: 4pin 0.65*0.65mm</p>
CHK_BS15D4C	CHK_BS15D4D	



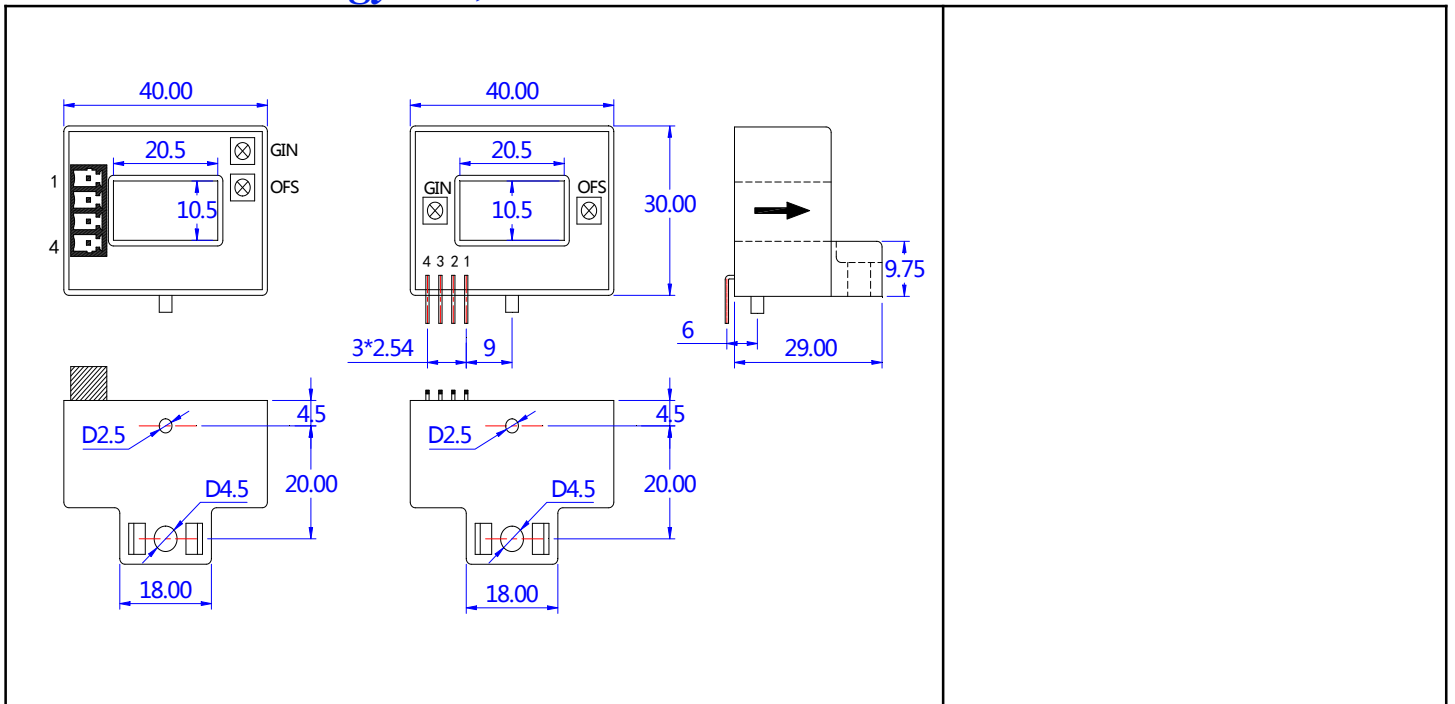

**Remarks:**

- When the current goes through the primary pin of a sensor, the voltage will be measured at the output end.
- Custom design is available for the different rated input current and the output voltage.
- The dynamic performance is the best when the primary hole is fully filled with.
- The primary conductor should be <math><100^{\circ}\text{C}</math>.

**WARNING : Incorrect wiring may cause damage to the sensor.**

